



www.xviveaudio.com

V6 Phaser King

Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

Power supply

Please connect the designated AC adapter to an AC outlet of the correct voltage.

Please be sure to use only an AC adapter which supplies 9V (+10%) DC, center minus. The maximum working voltage shall not exceed 18V, otherwise may be dangerous equipment damage, fire, or other problems.

Unplug the AC power adapter when not using or during electrical storms.

Connections

Always turn off the power of this and all other equipment before connecting or disconnecting, this will prevent malfunction and/or damage to other devices. Also make sure to disconnect all connection cables and the power cord before moving this unit.

Handling

Do not apply excessive force to the switches or controls.

Do not let paper, metallic, or other objects into this unit.

Take care not to drop the unit and do not subject it to shock or excessive pressure.

Cleaning

Clean only with a soft, dry cloth. If necessary, slightly moisten the cloth.

Do not use abrasive cleanser, cleaning alcohol, paint thinners, wax, solvents, cleaning fluids, or chemical-impregnated wiping cloths.

Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

Location

To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- .Direct sunlight
- .Magnetic fields
- .Excessive dusty or dirty location
- .Strong vibration or shocks
- .Heat sources
- .Extreme temperature or humidity
- .High humidity or moisture


Main features

- .The Phaser King is 9-volt supply pedal but with a higher head room and improved clarity
- .100% analog circuit design
- .Quiet operation with companding noise reduction circuitry
- .Compact size with three knobs controls, give you the flexibility to set the effect you desired.
- .Total (true) bypass

Effects Explanation

Phaser king pours on the special sauce to take your tone into outer space

Panel instruction

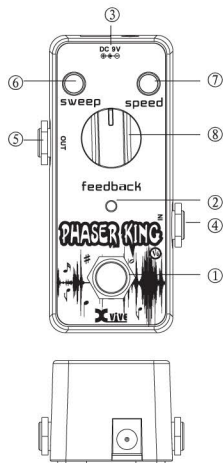

1.True Bypass Footswitch:

Push down the footswitch to switch between effects and bypass status

2.ON/OFF LED:

Instructs Effects or bypass status of Phaser king, when the LED is lit up, the effects is on.

3.DC IN Power jack:

For power supply, use a 9V DC regulated AC adapter(plug polarity is positive on the barrel and negative in the center).

4.INPUT Jack:

1/4" mono audio jack, for connecting guitar.

5.Output Jack:

1/4" mono audio jack, outputs the signal.

6.Sweep Control:

SWEEP RANGE control - allows adjusting the range of the sweep from none to very wide.

7.SPEED Control:

Adjusts the sweep speed from very slow to very fast.

8. Feedback control:

Sets the amount of effect from subtle to very deep.

Specifications

Input: 1/4" monaural jack (impedance: 10M ohms)

Output: 1/4" monaural jack(impedance: 150 ohms)

Power Requirements: AC adapter 9V DC (center minus plug)

Current Draw: 70 mA

Dimensions: 46 (W) * 94 (D) * 50 (H) mm

Accessories: Owner's manual



www.xviveaudio.com

Disclaimer: Any specification's update won't be amended in this manual