

AA60 MANUAL





IMPORTANT SAFETY INSTRUCTIONS

- Read these instructions carefully
- Keep this instruction manual
- Pay close attention to all the warnings
- Follow all instructions
- Do not use near water
- Do not, under any circumstance, expose to any dripping or splashing liquid
- Do not place items with liquids (such as vases, glasses or bottles of liquid) on top of the amp
- Clean only with a dry cloth
- Do not block any ventilation openings
- Install in accordance with the manufacturer's instructions
- Do not install near anything that produces heat. This includes things such as radiators, heaters, stoves and other amplifiers
- Do not modify or change the AC plug. A grounding type plug has two blades and a third grounding prong. The third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet
- Do not allow the power cable to be bent, pinched, walked on, or put in any such place where damage may occur
- Unplug the amplifier during lightning storms or when unused for long periods of time
- Contact manufacturer or authorized repair technician when servicing is needed. Servicing is required when the amplifier has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled objects have fallen into the



apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped

- Excessive sound pressure from earphones and headphones can cause hearing loss
- No naked flame sources, such as candles should be placed on or near the apparatus
- If needed, lift amplifier with care. Use a trolley as needed, but caution is advised to prevent the trolley tipping over

INTRODUCTION

Thank you for purchasing the Artist AA60 Acoustic Amplifier! Please read this user manual thoroughly to help you understand how to use your new amp and if you have any questions don't hesitate to reach out to us for assistance.

If you want to learn more about Artist Guitars, head to our website!

Australia

email: sales@artistguitars.com.au

phone: 1300 489 816

New Zealand

email: sales@artistguitars.co.nz

phone: 0800 025 467

United Kingdom

email: sales@artistguitars.co.uk

phone: 0 808 189 0084

United States

email: sales@artist-guitars.com


phone: 800 983 1047

FEATURES

The Artist AA60 is a powerful Acoustic Amplifier, suitable for home or the stage! The AA60 is perfect for a single acoustic guitar and microphone, and features dual-speaker design for crisp and clear headroom. It includes digital Reverb and Chorus effects, and a Phase switch on the guitar channel, with a second Reverb control knob for the Microphone channel. The AA60 has a ¼" TS Guitar input and an XLR Microphone input, with XLR-OUT for DI.




FRONT PANEL

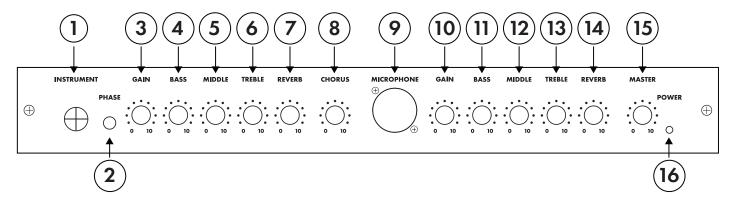

- 1. Instrument Input: ¼" Input for Acoustic Guitar
- 2. **Phase Switch:** Selects Phase ON/OFF. Use this to improve bass response at low volume and suppress feedback at higher volumes
- 3. Gain Control: Adjusts Instrument channel gain level
- 4. Bass Control: Adjusts Instrument channel low frequency level
- 5. Mid Control: Adjusts Instrument channel mid frequency level
- 6. Treble Control: Adjusts Instrument channel treble frequency level
- 7. **Reverb Control:** Adjust Instrument channel Reverb effect level, when turned down to 0 the effect is OFF
- 8. **Chorus Control:** Adjust Instrument channel Chorus effect level, when turned down to 0 the effect is OFF
- 9. Microphone Input: XLR input for Dynamic Microphone
- 10. Gain Control: Adjusts Microphone channel gain level
- 11. Bass Control: Adjusts Microphone channel low frequency level
- 12. Mid Control: Adjusts Microphone channel mid frequency level
- 13. Treble Control: Adjusts Microphone channel treble frequency level
- 14. **Reverb Control:** Adjust Microphone channel Reverb effect level, when turned down to 0 the effect is OFF.
- 15. Master Volume: Adjusts amplifier Volume level
- 16. Power Indicator LED: LED turns ON indicating amp power is engaged



REAR PANEL

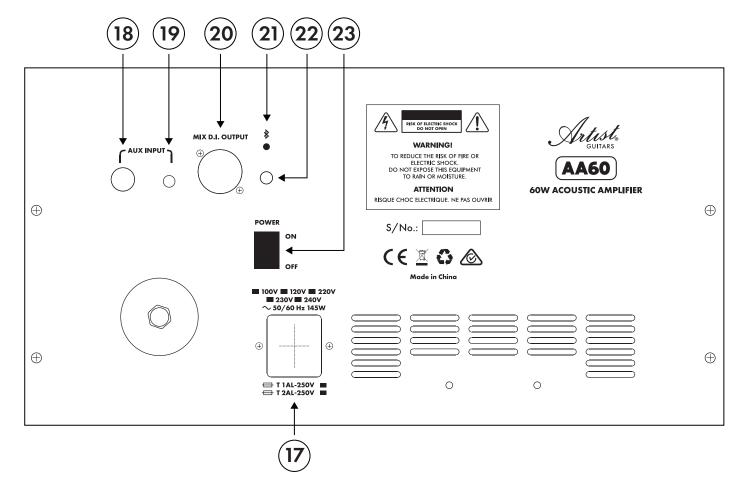

- 17. DC-IN: Use supplied power adaptor to provide power to the amplifier
- 18. Aux-IN 1: 6.35mm Aux Input jack to connect playback device
- 19. Aux-IN 2: 3.55mm Aux Input jack to connect playback device
- 20. **DI-OUT:** XLR DI output to connect amp to mixing desk/PA
- 21. Bluetooth Indicator LED: LED turns on indicating Bluetooth is ON
- 22. Bluetooth Button: Switches Bluetooth ON or OFF
- 23. Power Switch: Switches amplifier ON or OFF



CONNECT TO BLUETOOTH DEVICE

To connect your device, ensure the amplifier is switched on and has Bluetooth enabled and visible.

On your device, find the amplifier (Artist AA60) and select "pair".

You can use the Master Volume control in conjunction with the device volume to control the level.

SPECIFICATIONS

Power Output: 60W

Frequency Response: 80 Hz – 20 kHz SPL at 1 meter: 108 dB (measured)

Speaker: 6.5" & 3"

Input: AC220-240V

Input 1 (instrument): 6.35mm ($\frac{1}{4}$ ") instrument cable input

Input 2 (microphone): XLR Microphone cable input

Input Impedance: Channel 1: $10 M\Omega$

Channel 2: $2 k\Omega$

Aux Input (stereo): $10 \text{ k}\Omega$

Output Impedance: 600Ω balanced, mic level Phantom power tolerant

EQ: Low: ±12 dB @ 80 Hz (resonant)

Mid: ±10.5 dB @ 750 Hz (resonant) **High:** ±12.5 dB @ 15 kHz (shelving)

Bluetooth: V4.0 Version, maximum Bluetooth distance 10m

Net Weight: 8.2 kg Gross Weight: 9.8 kg

Size: $470(L) \times 305(W) \times 345(H)$ mm



If you require any assistance or if you want to learn more about Artist Guitars, head to our website or reach out via phone or email.

Australia

email: sales@artistguitars.com.au

phone: 1300 489 816

New Zealand

email: sales@artistguitars.co.nz

phone: 0800 025 467

United Kingdom

email: sales@artistguitars.co.uk

phone: 0 808 189 0084

United States

email: sales@artist-guitars.com

phone: 800 983 1047

Irtust.
GUITARS