



www.xviveaudio.com

V2 DISTORTION

Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

Power supply

Please connect the designated AC adapter to an AC outlet of the correct voltage .

Please be sure to use only an AC adapter which supplies 9V(+/-10%)DC.center minus .The maximum working voltage not exceed 12V.otherwise may be dangerous equipment damage.fire or other problems. Unplug the AC power adapter when not using or during electrical storms.

Connections

Always turn off the power of this and all other equipment before connecting or disconnecting ,this will help prevent malfunction and / or damage to other devices.

Also make sure to disconnect all connection cables and the power cord before moving this unit.

Handling

Do not apply excessive force to the switches or controls.

Do not let paper,metallic,or other objects into this unit.

Take care not to drop the unit,and do not subject it to shock or excessive pressure.

Cleaning

Clean only with a soft,dry cloth. If necessary ,slightly moisten the cloth.

Do not use abrasive cleanser,cleaning alcohol ,paint thinners,wax,solvents.

Cleaning fluids,or chemical-impregnated wiping cloths.

Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference.

Operate this unit at a suitable distance from radios and televisions.

Location


To avoid deformation,discoloration,or other serious damage,do not expose this unit to the following conditions;

- .Direct sunlight
- .Magnetic fields
- .Excessive dusty or dirty location
- .Strong vibration or shocks
- .Heat sources
- .Extreme temperature or humidity
- .High humidity or moisture

Main features

- .Distortion with high gain control
- .Wide range tone adjustment
- .Total (true) bypass
- .Ear out jacket

Panel instruction

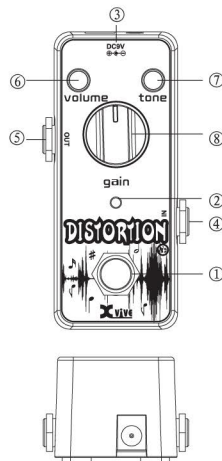

1.True Bypass Footswitch:

Push down the footswitch to switch between effects and bypass status

2.ON/OFF LED:

Instructs Effects or bypass status of V2, when the LED is lit up, the effects is on.

3.DC IN Power jack

For power supply, use a 9V DC regulated AC adapter(plug polarity is positive on the barrel and negative in the center).

4.INPUT Jack:

1/4" mono audio jack, for connecting guitar.

5.Output Jack:

1/4" mono audio jack, outputs the signal.

6.Volume Knob:

Sets the overall output level

7.The Tone Knob :

Emphasizes a range of tones, from bass to treble as the tone knob is clock wise

8.Gain Knob:

Determines how much distortion the pedal adds to your sound. As you turn the gain knob clock wise , the distortion and volume will increase dramatically

Specifications

Input: 1/4" monaural jack (impedance: 10M ohms)

Output: 1/4" monaural jack(impedance: 150 ohms)

Power Requirements: AC adapter 9V DC (center minus plug)

Current Draw: 10mA

Dimensions: 46 (W) *94 (D) *50 (H) mm

Accessories: Owner's manual



www.xviveaudio.com

Disclaimer: Any specification's update won't be amended in this manual